


Standard Materials

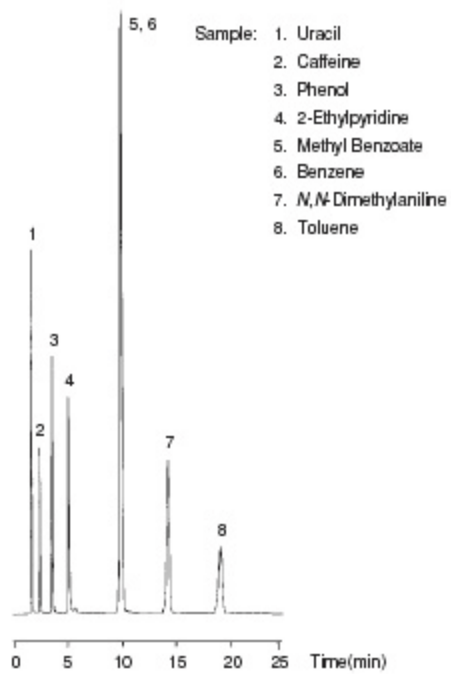

Column : Kaseisorb LC ODS-PH Super 4.6mm I.D. × 150mm
Mobile Phase : CH₃OH/H₂O=50/50
Detection : UV254nm
Flow Rate : 1.0ml/min
Temperature : 40°C