


## Standard Materials

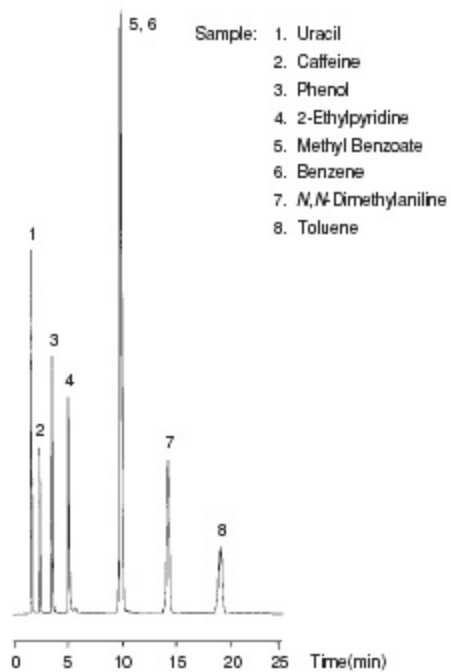

Column : Kaseisorb LC ODS-PH Super 4.6mm I.D. × 150mm  
Mobile Phase : CH<sub>3</sub>OH/H<sub>2</sub>O=50/50  
Detection : UV254nm  
Flow Rate : 1.0ml/min  
Temperature : 40°C